


Large Size – Alloys

LS-1950 – All Stainless Steel For High Pressure and Temperature

For high performance applications, the LS-1950 provides high temperature and pressure capabilities. Materials of construction comply with FDA food contact regulations.

Dimensions

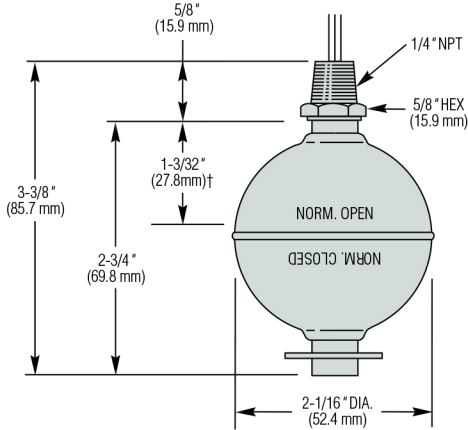

†L_s = Switch actuation level, nominal (based on a liquid specific gravity of 1.0 and N.O. dry circuit – dimension will vary for N.C. circuit).

Common Specifications

Electrical Termination: No. 18 AWG, 24" L., Polymeric Lead Wires (except Part No. 79999 which has Teflon® lead wires).

Approvals: LS-1950 Series switches are U.L. Recognized – File No. E45168 and are CSA Listed - File No. 30200
RoHS – In compliance with EU-directive 2011/65/EC requirements for chemicals and substances.
(Part No. 79999 is U.L. Recognized RoHS Compliant only).

Switch Operation: Selectable, N.O. or N.C., by inverting float on unit stem. Units are shipped N.O. unless otherwise specified.


How to Order – Select Part Number based on specifications required.

Series Number	Materials		Min. Liquid Sp. Gr.	Operating Temperature	Pressure, PSI, Max.	Switch ¹	Part Number
	Stem and Mounting	Float					
LS-1950	316 Stainless Steel		0.75	-40°F to +300°F (-40°C to +149°C)	750	SPST, 20 VA	01950 ⚡
				-40°F to +480°F (-40°C to +249°C)		SPST, 100 VA ²	26717 ⚡
						SPST, 20 VA	79999 ⚡

Notes

- See "Electrical Data" on Page X-5 for more information.
- UL Resistive Rated

⚡ – Stock Items.



Exceptionally accurate and rugged for higher temperatures and in pressurized or corrosive liquids.
For oils, water and chemicals.