

3800 Series – Pressure Transmitter

- ▶ FM and ATEX Approvals for Hazardous Locations
- ▶ 0 to 10,000 PSI (0 to 689 bar)
- ▶ Field Adjustable – 5:1 Turndown
- ▶ Compact, 316 Stainless Steel, Hermetically Sealed Enclosure
- ▶ 17-4 Stainless Steel Sensor, No O-Ring
- ▶ Dual Seal Approval
- ▶ Flush Mount Option Available

The 3800 Pressure Transmitter is a compact loop-powered (4-20 mA) transmitter, with a low power 1-5 VDC option also available. Its rugged construction makes cost of ownership low and it carries a three-year warranty. The 3800 Pressure Transmitter is suitable for hazardous locations and hostile environments. It meets applications where dependable, continuous monitoring is preferred. Zero and span are field adjusted via Gems calibration kit with USB communication cable.


Specifications

Pressure Range	0 to 10,000 psi
Over Pressure	
0-100 psi	3x FSPR
Up to 10,000 psi	2x FSPR
Burst Pressure	
0-100 thru 0-250 psi	40x FSPR
0-500 thru 0-1,000 psi	20x FSPR
0-2,500 psi	10x FSPR
0-5,000 psi	8x FSPR
0-10,000 psi	4x FSPR
Performance	
Long Term Stability	≤±0.5% URL/year
Accuracy	±0.25% URL (BFSL) Linearity, Hysteresis and Repeatability
Response Time	≤5 ms
Turndown	5:1 (2:1 for 100 psi range)
Temperature Ranges	
Compensated	-40°F to +176°F (-40°C to +80°C)
Ambient	-40°F to +176°F (-40°C to +80°C)
Process	-40°F to +194°F (-40°C to +90°C)
Storage	-40°F to +194°F (-40°C to +90°C)
Electrical	
Supply Voltage	8-30 VDC
Output	4-20 mA or 1-5 VDC (27 mW ± 5 mW @ 9 VDC)
Loop Resistance	800 Ohms @ 24 VDC
Circuit Protection	Reverse polarity and EMI/RFI protected
Connection	
Conduit Size	1/2" MNPT
Termination	18 AWG shielded cable, 6-feet (1.8 m)
Mechanical Configuration	
Wetted Parts	17-4 PH Stainless Steel
Enclosure	316 Stainless Steel (CF8M)
Approvals	FM, ATEX, CE
Weight	1.8 lbs. (0.8 kg)




Dimensions

1/2" MNPT with 1/4" FNPT

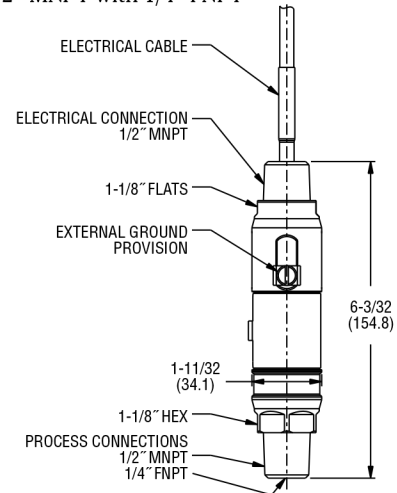

Flush Mount – 1/2" MNPT

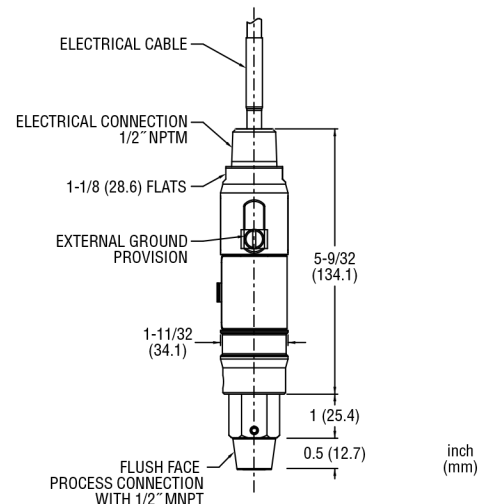

Agency Approvals

Approved*	Safety Method	Approval
FM (U.S. and Canada)	Explosion Proof Hazardous Locations	Class I, II, III; Division 1 Groups A-G; T5; Type 4X
	Non-incendive	Class I, II, III; Division 2 Groups A-G; T5; Type 4X
ATEX	Flameproof	II 2 G Ex d IIC T5 IP 66

* Product holds a Canadian Registration Number (CRN) in all provinces.

How to Order

Use the **bold** characters from the chart below to construct a product code.

SELECT

3800 - C 07 - A - UC - RR

Series 3800 - 3800 Series

Output C - 4-20 mA
V - 1-5 VDC

Range 03 - 0-100 psi (0-6.9 bar)
04 - 0-250 psi (0-17.2 bar)
05 - 0-500 psi (0-34.5 bar)
06 - 0-1,000 psi (0-68.9 bar)
07 - 0-2,500 psi (0-172.4 bar)
08 - 0-5,000 psi (0-344.7 bar)
09 - 0-10,000 psi (0-689.5 bar)

Accessories

BB - Cleaned for industrial oxygen service
C1 - Calibration Certificate
DS - Dual Seal approval (FM)¹
PK - Pipe mounting kit
RR - SS tag wired to housing with customer specified information

Approvals

UC - FM Approval (North, Central, and South America)
(blank) - FM and ATEX Approval (Europe and U.K.)

Process Connection Size

A - 1/2" MNPT with 1/4" FNPT
S - 1/2" MNPT Flush Mount, only for range 250-5,000 psi

Note:
1. Dual Seal version is not hermetically sealed.

For field adjustability, a Calibration Kit is required. Calibration Kit includes hardware and software. Contact Gems for additional information. P/N 9231503

3820 Series – Pressure Transmitter with 30V Switching

- ▶ Combines Continuous Output with Adjustable Set Point Switch
- ▶ FM and ATEX Approvals for Hazardous Locations
- ▶ Field Adjustable – 5:1 Turndown
- ▶ Compact, 316 Stainless Steel, Hermetically Sealed Enclosure
- ▶ Stainless Steel Sensor, No O-Ring
- ▶ Dual Seal Approval
- ▶ Flush Mount Option Available

The 3820 Pressure Transmitter is a compact loop-powered (4-20 mA) transmitter, with a low power 1-5 VDC option also available. These are the same as our 3800 Series with the addition of an integrated 30V/120mA switch. The switch setpoint is specified at time of order for factory setting, yet may be also field adjusted using the Gems Calibration Kit (that will also adjust the zero and span points of the transmitter). 3820 Series Pressure Transmitters are suitable for hazardous locations and hostile environments, and are ideal for applications where dependable, continuous monitoring is required. A rugged construction makes cost of ownership low and they carry a three-year warranty.


Specifications

Pressure Range	0 to 10,000 psi
Over Pressure	
0-100 psi	3x FSPR
Up to 10,000 psi	2x FSPR
Primary Switch Output	
Accuracy	±2% URL
Type	Normally Open Solid-State Relay
Electrical Rating	30V, 120 mA
Temperature Effect	±2% URL/100°F (38°C) @ -40°F to +176°F (-40°C to +80°C)
Burst Pressure	
0-100 thru 0-250 psi	40x FSPR
0-500 thru 0-1,000 psi	20x FSPR
0-2,500 psi	10x FSPR
0-5,000 psi	8x FSPR
0-10,000 psi	4x FSPR
Continuous Output	
Long Term Stability	≤±0.5% URL/year
Accuracy	±0.25% URL (BFSL) Linearity, Hysteresis and Repeatability
Response Time	≤5 ms
Turndown	5:1 (2:1 for 100 psi range)
Temperature Ranges	
Compensated	-40°F to +176°F (-40°C to +80°C)
Ambient	-40°F to +176°F (-40°C to +80°C)
Process	-40°F to +194°F (-40°C to +90°C)
Storage	-40°F to +194°F (-40°C to +90°C)
Electrical	
Supply Voltage	8-30 VDC
Output	4-20 mA or 1-5 VDC (27 mW ± 5 mW @ 9 VDC)
Loop Resistance	800 Ohms @ 24 VDC
Circuit Protection	Reverse polarity and EMI/RFI protected
Connection	
Conduit Size	1/2" MNPT
Termination	18 AWG shielded cable, 6-feet (1.8 m)
Mechanical Configuration	
Wetted Parts	17-4 PH Stainless Steel
Enclosure	316 Stainless Steel (CF8M)
Approvals	FM, ATEX, CE
Weight	1.8 lbs. (0.8 kg)




Dimensions

1/2" MNPT with 1/4" FNPT

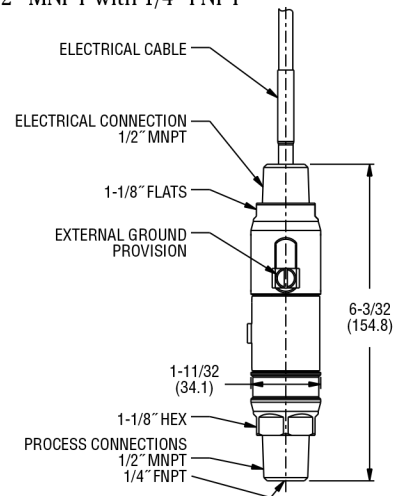


Flush Mount – 1/2" MNPT

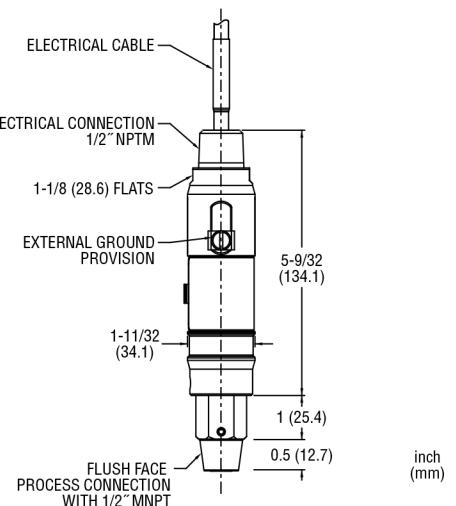

Switch Operation


Window Mode (WM)

Switch is closed when the process pressure is within the user selected range (LO and HI set points), and open when the pressure is above or below the range.

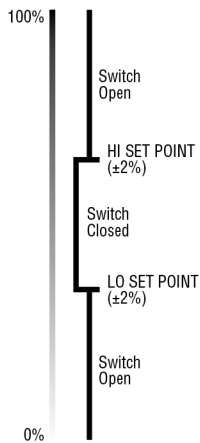


Close on Rise/Open on Fall (CR)

Switch is open when the process pressure is below the user selected set point and closed when the pressure is above that set point.

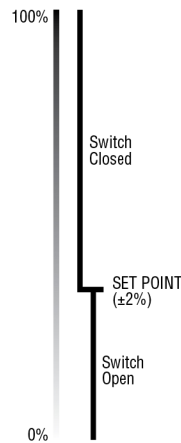

Open on Rise/Close on Fall (OR)

Switch is closed when the process pressure is below the user selected set point and open when the pressure is above that set point.

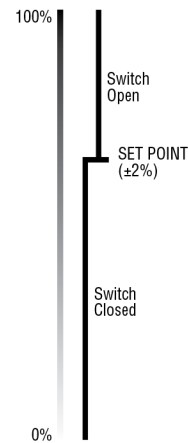

Agency Approvals

Approved*	Safety Method	Approval
FM (U.S. and Canada)	Explosion Proof Hazardous Locations	Class I, II, III; Division 1 Groups A-G; T5; Type 4X
	Non-incendive	Class I, II, III; Division 2 Groups A-G; T5; Type 4X
ATEX	Flameproof	II 2 G Ex d IIC T5 IP 66

* Product holds a Canadian Registration Number (CRN) in all provinces.

How to Order

Use the **bold** characters from the chart below to construct a product code.

SELECT 3820 - C 07 - A - UC - RR - FS - WM

Series	3820 - 3820 Series	Switch Operation	WM - Window Mode
Output	C - 4-20 mA V - 1-5 VDC		CR - Close on Rise/Open on Fall OR - Open on Rise/Close on Fall
Range	03 - 0-100 psi (0-6.9 bar) 04 - 0-250 psi (0-17.2 bar) 05 - 0-500 psi (0-34.5 bar) 06 - 0-1,000 psi (0-68.9 bar) 07 - 0-2,500 psi (0-172.4 bar) 08 - 0-5,000 psi (0-344.7 bar) 09 - 0-10,000 psi (0-689.5 bar)	Fixed Set Point	FS - Specify set point (in PSI or BAR, see example) ¹ Example: FS60PSI for 60 PSI or FS3BAR for 3 BAR
Process Connection Size	A - 1/2" MNPT with 1/4" FNPT S - 1/2" MNPT Flush Mount, only for range 250-5,000 psi	Accessories	BB - Cleaned for industrial oxygen service C1 - Calibration Certificate DS - Dual Seal approval (FM) ² PK - Pipe mounting kit RR - SS tag wired to housing with customer specified information
Note:		Approvals	UC - FM Approval (North, Central, and South America) (blank) - FM and ATEX Approval (Europe and U.K.)

Note:
1. Set Point must be within your Pressure Range.
2. Dual Seal version is not hermetically sealed.

For field adjustability, a Calibration Kit is required. Calibration Kit includes hardware and software. Contact Gems for additional information. P/N 9231503