


Ready-to-Ship Flow Switch & Continuous Flow Sensor Solutions for Your Applications

Avoid the hassle of long delays, canceled orders, halted projects, and downed equipment with Gems' readily shippable flow products

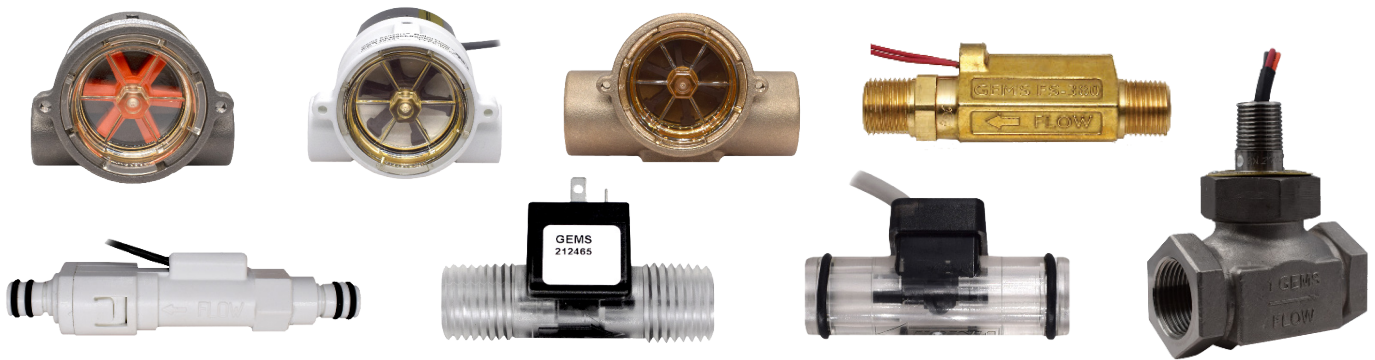

Flow Switches

MODEL	DESCRIPTION	FLOW SETPOINT RANGE (FIXED GPM)
FS-380	Compact, Piston-Type, High Inline Pressures	0.15 - 2.00
FS380-P	Industrial Strength, Inline, Piston-Type, Plastic	0.07 - 2.00
FS-480	Stainless Steel, Piston-Type, Large Flow, Low Pressure Drop	0.50 - 3.00
FS-200*	General Purpose, Shuttle-Type, Straight-Through Flow Path	0.50 - 50.00
FS-925	Compact, Piston-Type, Liquid or Gas	0.10 - 1.50
FS-926	Compact, Piston-Type, Low Flow, Liquid or Gas	0.13 - 0.75
FS-927	Miniature (1" x 2.75"), Piston-Type	0.10 - 1.50
FS-4	Piston-Type, Molded Ryton®, SPST or SPDT	0.10 - 1.50
FS-150	Piston-Type, Quick Disconnect, Low Pressure Drop	0.50 - 5.00
FS-500	Shuttle-Type, 90°, For Plastic Piping	0.25 - 5.00
RFS**	RotorFlow® Paddle Wheel-Type with Visual Indication	0.10 - 60.00

Continuous Flow Sensors

MODEL	DESCRIPTION	FLOW RANGE (GPM)
FT-100	Turbine Insert, Low Flow Rate, Custom-Mounted	0.20 - 2.00
RFA	RotorFlow® Paddle Wheel-Type, 0-10 VDC Analog Output	0.10 - 60.00
RFO***	RotorFlow® Paddle Wheel-Type, 4.5-24 VDC Pulsed Output	0.10 - 60.00
RFI***	RotorFlow® Paddle Wheel-Type, Visual Flow Indicator Only	0.10 - 60.00

*Fast-Shipping for Bronze Models, Stainless Steel Available with Increased Lead Times

**Adjustable Versions Available

***FDA Compliant Potable Versions Available

Ryton® is a registered trademark of Solvay International Chemical Group, LLC in Brussels, Belgium.

