

Small Size – Alloys

LS-700 Series Combines Durability of Metal with a Compact Design for Restricted Spaces

- ▶ Stainless Steel or Brass Mountings and Stems
- ▶ 1 to 5 Actuation Levels
- ▶ Lengths to 48 inches

These compact units feature the rugged durability of stainless steel or brass construction in a lightweight package. Ideal for tanks less than 4 feet.

LS-700 Series switches are exceptionally versatile because of the many useful options available. Described briefly below, these options can extend the functionality of your GEMS LS-700 Series custom switch.

Temperature Sensing

To save space and simplify wiring, GEMS can incorporate a temperature sensor in the end of the float stem on any model type LS-700. Two sensor types are available: Transducers for continuous output, and Thermostats for switch actuation. See Page B-23 for details.



Solid-State Relays

Control motors, pumps, valves and other "load" devices with GEMS Solid-State Relays. Intrinsically-safe relays and barriers allow safe operation of level switches in hazardous areas. See Section I for details.

1. Mounting Types

Each mounting type can be configured with stem lengths (L_0) and float material indicated in this table.

Note: Sanitary flange mountings are also available, but not shown. Please contact factory.

in
(mm)

Type 1 1/8" NPT	Type 2 3/4" NPT ¹	Type 3 1" NPT	Type 4 3-5/8" Dia. Flange
<p>0.53 (13.5) REF. 1/2" HEX 0.14 (3.56) REF.</p>	<p>1-1/16" HEX 5/16 (7.94) REF. 1-1/16 REF. (27)</p>	<p>1-5/16" HEX 5/16 (7.94) REF. 1-1/4 REF. (31.75)</p>	<p>BOLT CIRCLE DIA. 3.0 (76.2) 3-5/8 DIA. (92.1) 5/16 THRU (6) HOLES (7.9) 1/8" NPT 3/16 (4.8)</p>
Type 5 1-5/16-12UNF-2A	Type 6 3/8-24	Type 7 1-1/4" NPT ¹	
<p>1-1/2" HEX 0.52 (13.2) REF. 1.12 (28.4) REF. NEOPRENE O-RING</p>	<p>3/4 (19.1) REF. 1.0 (25.4) REF. 1/2" HEX</p>	<p>1.0 (25.4) SQ. 1-1/4 (31.75) REF. 11/16 (17.46) REF.</p>	

Stem & Mounting Material	Brass or 316 Stainless Steel		
Maximum Length	48 inches (121.9 cm) - 21" (53.3 cm) Max on Bent Stem Versions (Consult Factory)		
Mounting Position	Vertical $\pm 30^\circ$ Inclination		
Float Stops²	Brass Units: Beryllium Copper Grip Rings; Stainless Steel Units: S.S. ARMCO PH-15-7MO Grip Rings		
Max. Pressure Rating³	See Float Value on Following Page	50 psi (3.5 bar)	

Notes:

1. Mounting Types 2, 3 & 7 are available with a 1/2" MNPT conduit adaptor. This option can be selected on the checklist.
2. In some instances, concentrations of chlorine and other corrosive compounds in the media require the use of collar type float stops. Consult factory for details.
3. Mounting only. Maximum pressure rating for complete unit will be the lower of this pressure or the selected float pressure (see Float Types, on next page).



Ordering is Easy! See Page B-15.
Easy online ordering too!



LEVEL SWITCHES – MULTI POINT

2. Float Types

A single float type is selected for use at all actuation points.

Float Materials	Buna-N		PTFE – Spring Biased	Polypropylene	
Compatible Mounting Types	1, 2, 3, 4, 5, 6, 7	1, 3, 4, 5, 6, 7	1, 2, 3, 4, 5, 6, 7	1, 3, 4, 5, 6, 7	1, 2, 3, 4, 5, 6, 7
Float Dimensions					
Part Number	187553	39049	133764	145730	197732
Operating Temperature	Water: to 180°F (82.2°C) Oil: -40°F to +300°F (-40°C to 149°C)		-40°F to +300°F (-40°C to +149°C)	-40°F to +225°F (-40°C to +107°C)	-40°F to +250°F (-40°C to +121°C)
Max. Pressure	300 psi (20.7 bar)*		1000 psi (69 bar)*	50 psi (3.5 bar) @ 70°F*	100 psi (6.9 bar)
Min. Liquid Specific Gravity	0.65	0.45	0.65	0.65	0.95

Float Materials	316 Stainless Steel**				
Compatible Mounting Types	1, 4, 6	1, 3, 4, 5, 6, 7	1, 4, 5, 6, 7	1, 2, 3, 4, 5, 6, 7	1, 2, 3, 4, 5, 6, 7
Float Dimensions					
Part Number	60241	141750	156900	136550	158369
Operating Temperature	-40°F to +300°F (-40°C to +149°C)**				
Max. Pressure	100 psi (6.9 bar)	275 psi (19 bar)	600 psi (41.4 bar)	400 psi (27.6 bar)	150 psi (10.3 bar)
Min. Liquid Specific Gravity	0.70	0.85	0.90	1.10	0.85

* De-rated with increasing temperature above 70°F (21°C).


** 316 Stainless Steel floats are available with ceramic potting that allows temperatures to 400°F (204°C); contact factory for these high-temperature applications.

Optional Mountings

Please contact Gems Sensors about these mountings or other requirements not seen here.


Bent Stem (LS-77700)

Used when tank top or bottom is inaccessible.




Integral Receptacle

2–5 Pin miniature receptacle for mounting Type 2 or Type 3; eliminates splicing and eases connections.



Conduit Adapter

A 1/2" MNPT conduit is available for Mounting Type 2 & 3. Select from list of options on the Check List.



3. Number of Actuation Levels and Electrical Specifications

Typically, one float is required for each point at which you need a switch action to occur. The number of actuation levels available depends on the Group Type Wiring selected; see below.

Group I Wiring: 1 to 5 Actuation Levels.

Group II Wiring: 1 to 3 Actuation Levels.

Switch (SPST, N.O. or N.C.): 20 /100 VA.


Lead Wires: 22 AWG, 24" L., PTFE.

Approvals: LS-700 Series switches are U.L. Recognized – File No. E45168;


Typical Wiring Diagrams

For clarity, only two actuation levels are shown in each group diagram.

GROUP I SPST



GROUP II SPST



Wiring Color Code

Tinted area designates U.L. Recognized wiring configurations.


SPST Switches			
Wiring	Group I	Group II	
Common Wire	Black	None	
	NO/NC	SW Com.	NO/NC
L₁	Red	Red	Red
L₂	Yellow	Yellow	Yellow
L₃	Blue	Blue	Blue
L₄	Brown		
L₅	Orange		

Notes:

- Units with 100 VA switches are not U.L. Recognized.
- See "Electrical Data" on Page X-5.

4. Actuation Level Dimensions

Actuation Levels*—Typical

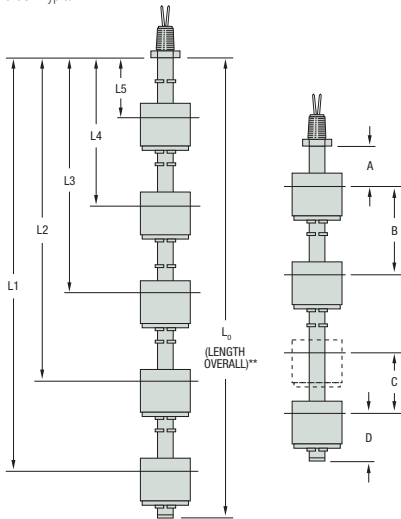

* Actuation level distances and L₀ (overall unit length) are measured from inner surfaces of mounting plug or flange.

** Length Overall (L₀) = L₁ + Dimension D. See Mounting Types for Maximum Length values.

Switch actuation levels are determined following the guidelines below.

A = Minimum distance to highest actuation level.

B = Minimum distance between actuation levels.


C = Minimum distance between two actuation levels with one float (Note: One float for two levels can be used only when low level is N.C. dry and high level is N.O. dry).

D = Minimum distance from end of unit to lowest level.

Float Part Number	Dimensions			
	A	B	C	D
39049	11/16" (17.5 mm)	1-5/8" (41.3 mm)	1/8" (3.2 mm) Min.	3/4" (19.1 mm)
60241	9/16" (14.3 mm)	1-15/16" (49.2 mm)		15/16" (23.8 mm)
133764	3/4" (19.0 mm)	1-1/2" (38.1 mm)		7/8" (22.2 mm), N.O. 1-3/16" (30.2 mm), N.C.
136550	5/16" (7.9 mm)	1-7/8" (47.6 mm)		1-11/16" (42.9 mm)
141750	1/2" (12.7 mm)	1-9/16" (39.7 mm)		1-1/8" (28.6 mm)
145730	5/8" (15.9 mm)	1-3/8" (34.9 mm)		13/16" (20.6 mm)
156900	9/16" (14.3 mm)	1-9/16" (39.7 mm)		13/16" (23.8 mm)
158369	5/8" (15.9 mm)	1-7/8" (47.6 mm)		1-3/8" (34.9 mm)
187553	11/16" (17.5 mm)	1-7/16" (36.5 mm)		7/8" (22 mm)
197732	1/2" (12.7 mm)	1-3/8" (34.9 mm)		1" (25.4 mm)

Notes:

- A, B and D dimensions based on a liquid specific gravity of 1.0.
- Tolerance on actuation levels is ±1/8" (3.2 mm).
- For bent stem versions, please request drawing LS-77700.

 <p>Photocopy This Form Use one form for each product type you are selecting.</p> <p><small>This form may also be completed online at gemssensors.com for RFQ.</small></p>	This is a <input type="checkbox"/> Request for a Quote <input type="checkbox"/> Order P.O.# _____ Name _____ Company _____ Street _____ City _____ State _____ Zip _____ Date Required ____/____/____ Shipping Method: _____ Phone (____) _____ Partials Accepted: <input type="checkbox"/> Yes <input type="checkbox"/> No Fax (____) _____
---	---

LS-700 Types Custom Length Float Type Level Switches

Application Environmental Conditions

This information is essential to the accurate and proper operation of your GEMS configurable sensors. Please complete fully and accurately.

- | | |
|--|---|
| <p>1. Liquid Media: _____</p> <p>2. Pressure: Minimum _____ psig Maximum _____</p> <p>3. Temperature: Minimum _____ °F Maximum _____</p> <p>4. Specific Gravity: Minimum _____ Maximum _____</p> | <p>5. Viscosity: _____ SSU</p> <p>6. Tank Material: _____</p> <p>Tank Depth: _____</p> <p>7. Unit is Mounted In: <input type="checkbox"/> Tank Top <input type="checkbox"/> Tank Bottom</p> |
|--|---|

1. Series Type:

- LS-700 TH-700 (Thermostat Equipped)
 TM-700 (Thermistor Equipped)

2. Mounting Type and Materials:

A. Mounting Type:

- Type 1 Type 2 Type 3 Type 4
 Type 5 Type 6 Type 7

B. Mount and Stem Material:

- Brass
 316 Stainless Steel

3. Float Part Number: _____

Matching floats will be used at each actuation level specified.

4. Switch Type and Rating:

- A. Group I Group II

- B. SPST

- C. 20 VA 100 VA

Please indicate if using microprocessor/PLC load: Yes No

5. Switch Actuation Level

A.

Actuation Level	Distance to Actuation Level – Inches*	SPST Switch Operation** (Check Type)	
		N.O.	N.C.
L ₅			
L ₄			
L ₃			
L ₂			
L ₁ ***			

* Measured from inner surface of mounting plug or flange.

** Switch position is "normal" with unit dry (tank empty).

*** L₁ is the distance to the lowest actuation level with mounting "up," and is the distance to the highest actuation level with mounting "down."

- B. Length Overall (L₀) _____ inches.

6. Lead Wire Length:

- 12" 24" Other: _____ inches.

7. Options:

- Temperature Switch Settings (°F): 100 125 150
 175 200

On rising temperature, switch... Opens Closes

- Slosh Shield Collars

- 1/2" NPT Conduit Connection (available for Types 2, 3 & 7)

J-box Electrical Connection

- NEMA 4 Type

Please contact GEMS Sensors Inc. for any configuration or special requirements not covered on this form. **800-378-1600**

Quote: \$ _____ Date Quoted: ____/____/____

Additional minimum charges may apply on special orders.

